

FULBAT™



BATTERY PROGRAM

www.fulbat.com





Fulbat, european belgian based company, has been a leading force in the battery business over the past years in both replacement and OEM markets. Fulbat batteries feature a comprehensive line of Ca/Ca, VRLA, GEL, SLA, Maintenance free and Dry charged specific designs. It covers a wide range of applications – motorcycle, scooter, ATV, watercraft, snowmobile, utility vehicles and Lawn & Garden.

Fulbat brand is widely distributed in the world through a strong distributor's network.

All products are manufactured according to the most innovative production processes, certified by ISO 9001, ISO 14001 and ISO/TS 16949.



MOTORCYCLE BATTERY

4

GEL BATTERY

6

SLA BATTERY

8

MF BATTERY

10

DRY BATTERY

12

LAWN & GARDEN BATTERY

16

SLA BATTERY

18

CA/CA BATTERY

20

DRY BATTERY

22

VRLA BATTERY

23

BATTERY TECH

24

BATTERY TYPE NUMBER

25

CHARGER

26

BANK CHARGER

29

TESTER

30

BATTERY FINDER

31

SUPPORT

32

WEBSITE

33



+GEL

+SLA

FULBAT™

TYPE

FHD20HL-BS

GEL

NON-SPILLABLE

12V 21.1Ah (20h) spec 20Ah (10h) 460A (EN)

Standard: 2.0A x 5-10h charging guide Quick: 10.0A x 1h SAE J221 JPP 1

FULBAT™

TYPE

FTZ12S

SLA

NON-SPILLABLE

12V 11.6Ah (20h) spec 11Ah (10h) 205A (EN)

Standard: 1.2A x 5-10h charging guide Quick: 5.5A x 1h SAE J221 JPP 1


Picture (before modification): Kawasaki.

FULBAT™

MOTORCYCLE BATTERY


MF

DRY

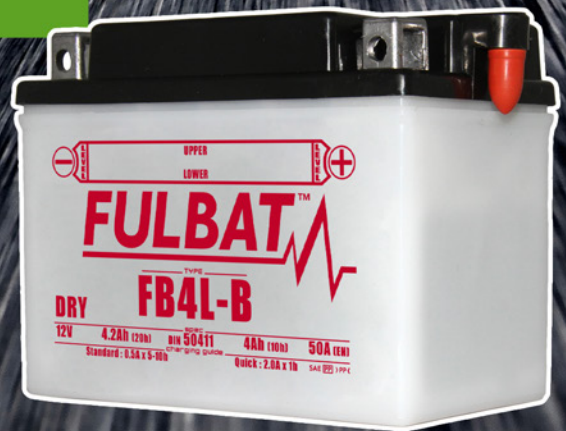

GEL TECHNOLOGY

- READY TO USE
- WET CHARGED FACTORY ACTIVATED
- VALVE REGULATED LEAD ACID BATTERY
- NON SPILLABLE : EASY TO SHIP
- 100% MAINTENANCE FREE
- DEDICATED HARLEY-DAVIDSON TERMINALS
- MINIMIZED PLATE SULFATION
- SUITABLE FOR COLD WEATHER
- NO ACID HANDLING
- EASY TO INSTALL
- HIGHER LIFE CYCLE

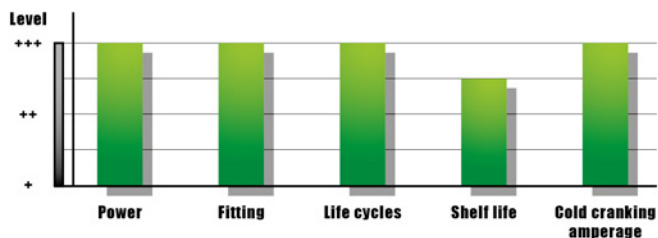






Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	Factory activated	Dimensions mm (±2mm)			Assembly drawing	Terminal	Terminal drawings			
					L	W	H			Front	Side	Top	3D
FHD14HL-BS	12	14	14.7	Yes	149	87	144		Harley Davidson				
FHD20HL-BS	12	20	21.1	Yes	176	87	154		Harley Davidson				
FHD30HL-BS	12	30	31.5	Yes	166	130	175		Harley Davidson				
FHD30HL-BS +SPACER	12	30	31.5	Yes	166	130	197		Harley Davidson				



SLA TECHNOLOGY

- READY TO USE
- WET CHARGED FACTORY ACTIVATED
- VALVE REGULATED LEAD ACID BATTERY
- NON SPILLABLE : EASY TO SHIP
- 100% MAINTENANCE FREE
- MULTI-POSITIONAL FITMENT
- MINIMIZED PLATE SULFATION
- SUITABLE FOR COLD WEATHER
- NO ACID HANDLING
- EASY TO INSTALL
- HIGHER LIFE CYCLE

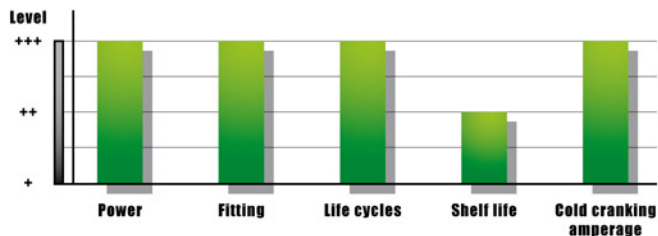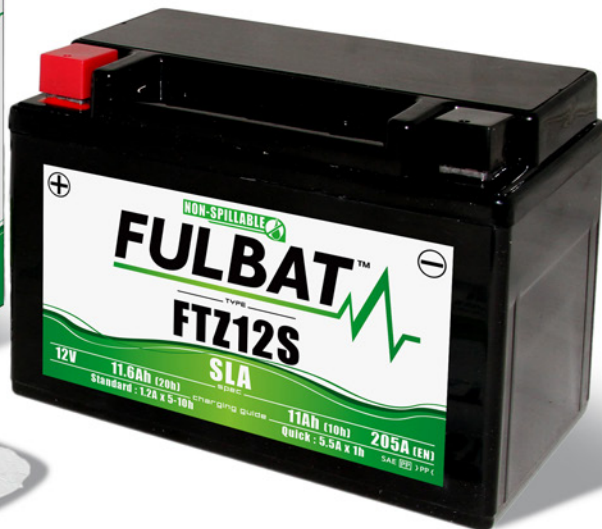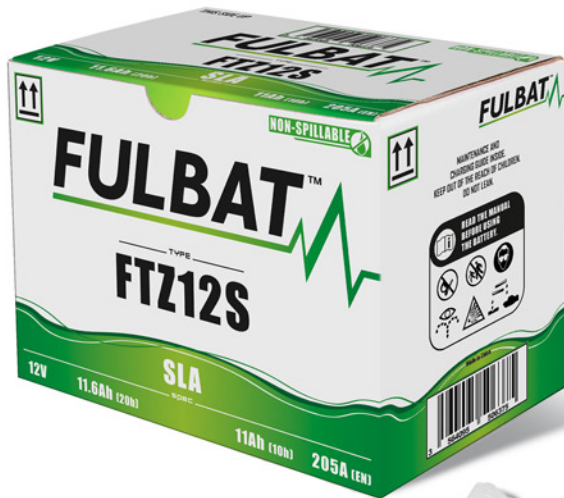



Technical features





Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	CCA A [-18°C/0°F]	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
					L	W	H		Front	Side	Top	3D
FTX4L-BS (SLA)	12	4	4.2	50	113	70	85					
FTZ5S	12	4	4.2	70	113	70	85					
FTZ7S	12	6	6.3	130	113	70	105					
FT7B-4	12	6.5	6.8	85	150	65	93					
FT9B-4	12	8	8.4	115	150	68	105					
FTZ10S	12	8.6	9	190	150	88	93					
FT12B-4	12	10	10.5	175	150	69	130					
FTZ12S	12	11	11.6	210	150	88	110					
FT14B-4	12	12	12.6	210	150	69	145					
FTZ14S	12	11.2	11.8	230	150	88	110					
FCP12-19	12	19	20	275	182	77	168					

MOTORCYCLE



MF TECHNOLOGY

- VALVE REGULATED LEAD ACID BATTERY
- DELIVERED WITH ACID PACK
- NEED TO BE FILLED BEFORE FIRST USE
- NO MAINTENANCE ONCE ACTIVATED
- NO ACID IN CELLS BEFORE ACTIVATION
- HIGHER LIFE CYCLE
- UPRIGHT INSTALLATION ONLY
- REDUCTION OF PLATE SULFATION
- SUITABLE FOR COLD WEATHER

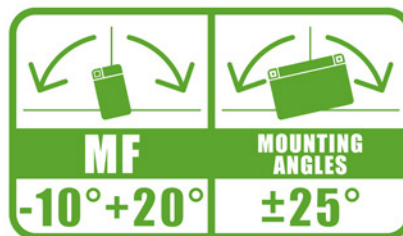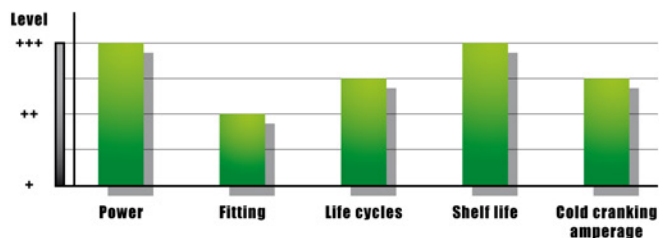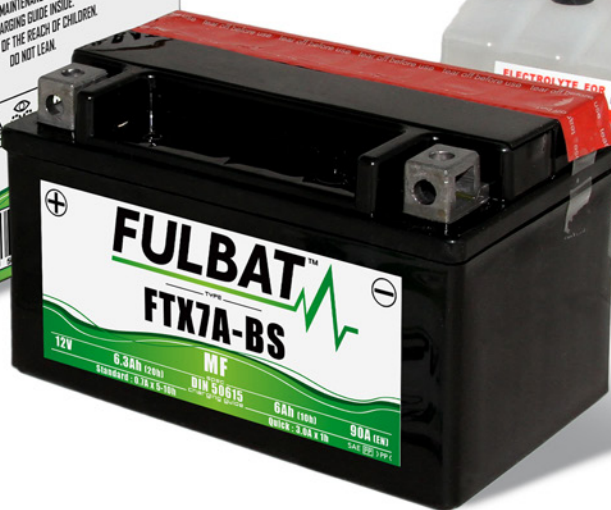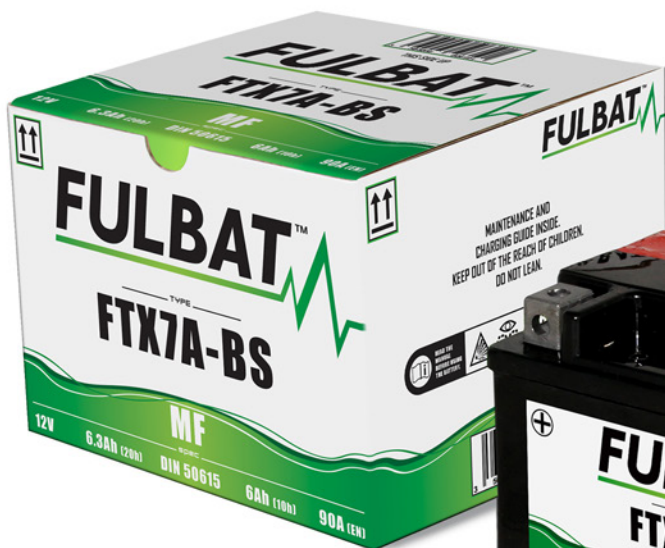





Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C/0°F)	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
					L	W	H		Front	Side	Top	3D
FTR4A-BS	12	2.3	2.4	45	113	48	85					
FT4B-BS	12	2.3	2.4	40	113	38	85					
FTX4L-BS	12	3	3.2	50	113	70	85					
FTX5L-BS	12	4	4.2	70	113	70	105					
FTX7L-BS	12	6	6.3	85	113	70	130					
FTX7A-BS	12	6	6.3	90	150	87	93					
FTX9-BS	12	8	8.4	120	150	87	105					
FTX12-BS	12	10	10.5	180	150	87	130					
FT12A-BS	12	10	10.5	175	150	88	105					
FTX14-BS	12	12	12.6	200	150	87	145					
FTX14L-BS	12	12	12.6	200	150	87	145					
FTX14AH-BS	12	12	12.6	210	135	90	167					
FTX14AHL-BS	12	12	12.6	210	135	90	167					
FTX16-BS	12	14	14.7	230	150	87	161					
FTX20A-BS	12	18	18.9	270	150	87	161					
FTX20-BS	12	18	18.9	270	175	87	155					
FTX20L-BS	12	18	18.9	270	175	87	155					
FTX24HL-BS	12	21	22.1	350	205	87	162					
FIX30L-BS	12	30	31.5	385	165	125	175					



DRY TECHNOLOGY

- LEAD ACID DRY CHARGED CONSTRUCTION
- NO ACID IN CELLS BEFORE ACTIVATION
- NEED TO BE FILLED BEFORE FIRST USE
- HAS TO BE CHECKED PERIODICALLY AND REFILLED IF NECESSARY
- UPRIGHT INSTALLATION ONLY
- 6V & 12V BATTERIES
- REGULAR LIFE DURATION
- DOESN'T NEED TO BE RECHARGED DURING SHELF LIFE

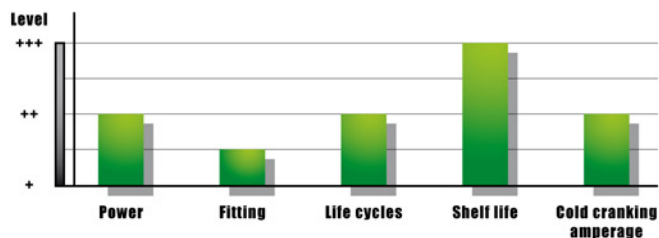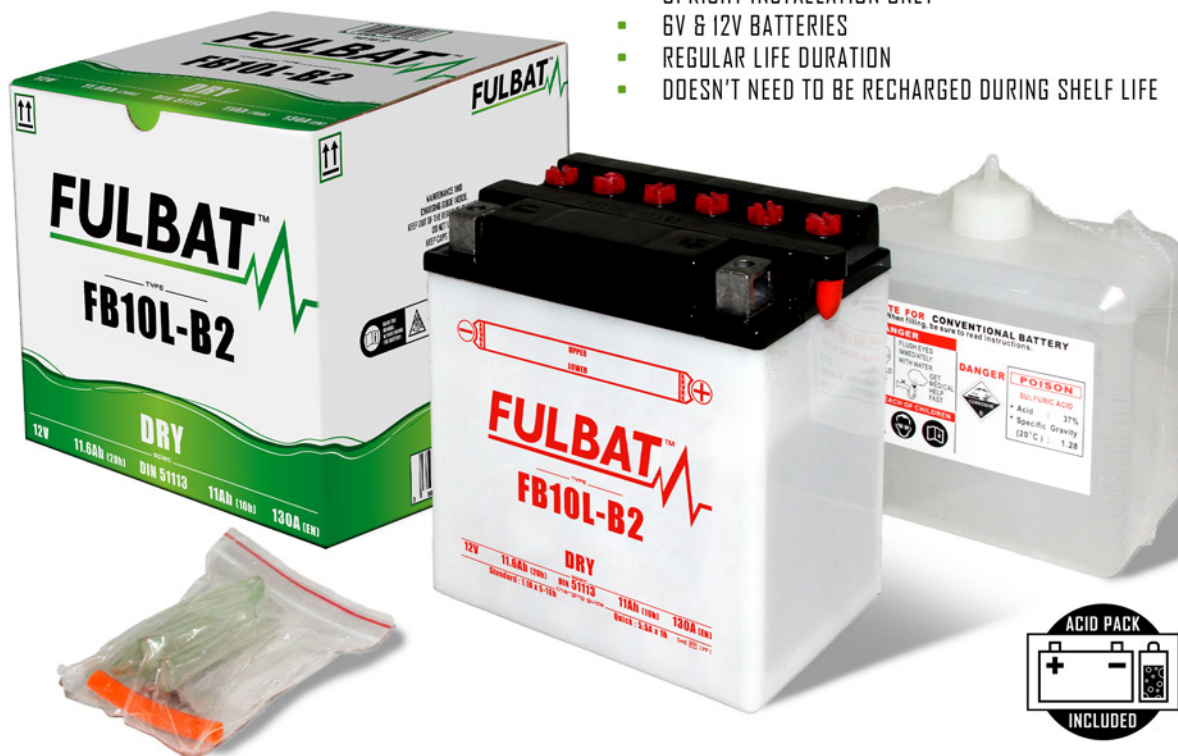



Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C/0°F)	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
					L	W	H		Front	Side	Top	3D
6N4-2A	6	4	4.2	25	71	71	96		-	-	-	-
6N4-2A-4	6	4	4.2	25	71	71	96		-	-	-	-
6N4B-2A	6	4	4.2	24	102	48	96		-	-	-	-
6N6-3B	6	6	6.3	50	99	57	111					
6N6-3B-1	6	6	6.3	50	99	57	111					
6N11A-1B	6	11	11.6	90	122	62	131					
6N11A-3A	6	11	11.6	90	122	62	131					
6N11A-4	6	11	11.6	90	122	62	131					
B39-6	6	7	7.4	60	126	48	126					
B49-6	6	8	10.5	80	91	83	160					
B38-6A	6	13	13.7	105	119	83	161					
12N5.5-3B	12	5.5	5.8	44	135	60	130					
12N5.5-4A	12	5.5	5.8	44	135	60	130					
FB3L-A	12	3	3.2	32	98	56	110					
FB3L-B	12	3	3.2	32	98	56	110					
FB4L-B	12	4	4.2	56	120	70	92					
FB5L-B	12	5	5.3	65	120	60	130					
FB7-A	12	8	8.4	124	135	75	133					
FB7L-B2	12	8	8.4	124	135	75	133					
FB7C-A	12	8	8.4	124	130	90	114					
FB9-B	12	9	9.5	130	135	75	139					
FB9L-B	12	9	9.5	130	135	75	139					
FB10L-A2	12	11	11.6	160	135	90	145					
FB10L-B2	12	11	11.6	160	135	90	145					
FB10L-BP	12	11	11.6	165	135	90	145					
FB12A-A	12	12	12.6	165	134	80	160					



Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	CCA A [-18°C/0°F]	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
					L	W	H		Front	Side	Top	3D
FB12A-B	12	12	12.6	165	134	80	160					
FB12AL-A	12	12	12.6	165	134	80	160					
FB12AL-A2	12	12	12.6	165	134	80	160					
FB12C-A	12	12	12.6	165	134	80	175					
FB14-A2	12	14	14.7	190	134	89	166					
FB14L-A2	12	14	14.7	190	134	89	166					
FB14L-B2	12	14	14.7	190	134	89	166					
FB14A-A1	12	14	14.7	190	134	89	176					
FB14A-A2	12	14	14.7	190	134	89	176					
FB16B-A1	12	16	16.8	175	160	90	161					
FB16AL-A2	12	16	16.8	175	207	71.5	164					
FB16CL-B	12	19	20	240	175	100	175					
FB18L-A	12	18	18.9	235	180	90	162					
FB30L-B	12	30	31.5	300	165	130	176					
FB30CL-B	12	30	31.5	300	165	130	192					
F50-N18L-A	12	20	21.1	260	205	90	162					
F50-N18L-A3	12	20	21.1	260	205	90	162					
F50-N18A-A	12	20	21.1	260	205	90	176					
51814	12	-	18	210	186	82	171					
51913	12	-	19	210	186	82	171					
53030	12	-	30	300	186	130	171					



FULBAT™

FEEL THE POWER

BATTERY

⊕ SLA/GEL/VRLA



⊕ Ca/Ca



CHARGER



⊕ MF



TESTER



⊕ DRY



Picture (before modification): Kawasaki.



WWW.FULBAT.COM

NEW



SLA



Ca / Ca



DRY



VRLA



FULBAT™

LAWN & GARDEN BATTERY

Over the past few years, the FULBAT brand acquired a great and undeniable experience in the field of starting batteries.

The main lineup, which was dedicated to powersports activities, supplied distributors with success on both replacement and OEM markets. The lineup was composed of factory activated (SLA), maintenance free (MF) and conventional (DRY) batteries. Today, with all the experience gained, FULBAT is now moving into a new level and offers a comprehensive lineup of batteries especially designed for Lawn & Garden machinery.

In order to fulfill the expectancies of the most demanding users, new products were developed including the brand new Ca/Ca (Calcium/Calcium) & VRLA line-up.

The quality of the materials and the most demanding manufacturing processes utilized allow FULBAT to offer a very reliable and efficient range of batteries.

Certified by ISO 9001, ISO 14001 and ISO/TS 16949, FULBAT batteries are already sold over 25 countries across Europe.



Read more about this new product range on this brochure and on the website : www.fulbat.com/garden.

SLA TECHNOLOGY

- NON-SPILLABLE
- AGM TECHNOLOGY
- READY TO USE
- WET CHARGED FACTORY ACTIVATED
- VALVE REGULATED LEAD ACID BATTERY
- NON SPILLABLE : EASY TO SHIP
- 100% MAINTENANCE FREE
- NO ACID HANDLING
- EASY TO INSTALL
- HIGHER LIFE CYCLE
- MULTI-POSITIONAL FITMENT
- MINIMIZED PLATE SULFATION
- SUITABLE FOR COLD WEATHER



U1-9
U1R-9

U1-12
U1R-12





FBS1225
FBS1225L







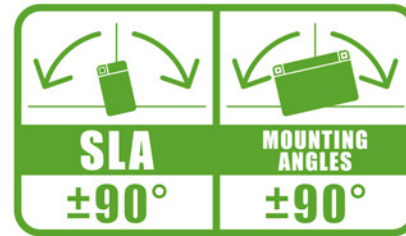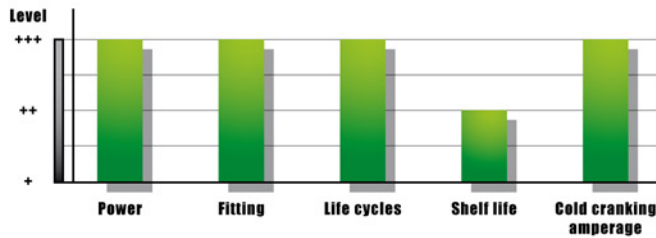


SLA12-18
SLA12-20

SLA12-22
FTX16





Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	Factory activated	Non spillable	Acid pack included	Magic Eye	Handle	In box	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
										L	W	H		Front	Side	Top	3D
U1-9	12	28	29.5	Yes	Yes	No	No	Yes	No	195	125	176					
U1R-9	12	28	29.5	Yes	Yes	No	No	Yes	No	195	125	176					
U1-12	12	32	33.7	Yes	Yes	No	No	Yes	No	195	125	176					
U1R-12	12	32	33.7	Yes	Yes	No	No	Yes	No	195	125	176					
SLA12-18	12	18	18.9	Yes	Yes	No	No	No	Yes	182	77	168					
SLA12-20	12	20	21.1	Yes	Yes	No	No	No	Yes	182	77	168					
SLA12-22	12	22	23.2	Yes	Yes	No	No	No	Yes	182	77	168					
FTX16	12	14	14.7	Yes	Yes	No	No	No	Yes	150	87	161					
FBS1225	12	2.5	2.6	Yes	Yes	No	No	No	Yes	112	88	69					
FBS1225L	12	3	3.2	Yes	Yes	No	No	No	Yes	223	44	69					

NON EXHAUSTIVE LIST

CA/CA TECHNOLOGY

- ACTIVATED AND PRE-CHARGED BATTERY
- ABSOLUTELY MAINTENANCE FREE
- READY & EASY TO USE
- NO ACID HANDLING - VERY SAFE
- INCREASED POWER & EXTENDED SERVICE LIFE
- EXTREME VIBRATION RESISTANCE
- MAINTENANCE FREE CALCIUM / CALCIUM CONSTRUCTION
- LIGHTWEIGHT POLYPROPYLENE CONTAINER
- FLAT TOP COVER
- VENTING SYSTEMS
- HANDLE
- MAGIC EYE

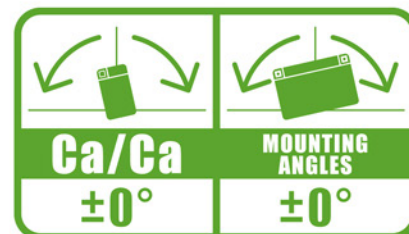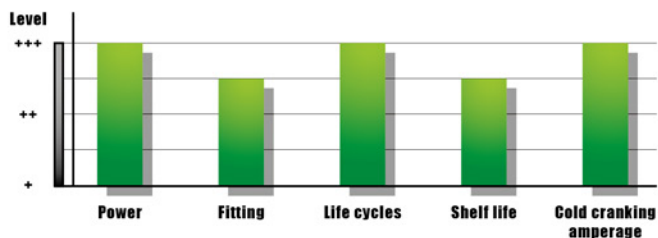



Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	Factory activated	Non spillable	Acid pack included	Magic Eye	Handle	In box	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
										L	W	H		Front	Side	Top	3D
U1-9	12	28	29.5	Yes	No	No	Yes	Yes	No	196	132	185					
U1R-9	12	28	29.5	Yes	No	No	Yes	Yes	No	196	132	185					
U1-12	12	32	33.7	Yes	No	No	Yes	Yes	No	196	132	185					
U1R-12	12	32	33.7	Yes	No	No	Yes	Yes	No	196	132	185					
NS40L	12	36	37.9	Yes	No	No	Yes	Yes	No	195	126	221					
NS40	12	36	37.9	Yes	No	No	Yes	Yes	No	195	126	221					
NS60L	12	45	47.4	Yes	No	No	Yes	Yes	No	236	128	222					
NS60	12	45	47.4	Yes	No	No	Yes	Yes	No	236	128	222					

NON EXHAUSTIVE LIST



MAGIC EYE :
DISPLAYS THE CHARGE STATUS
GREEN : BATTERY OK
BLACK : RECHARGE
WHITE : CHANGE




INTEGRATED HANDLE



DRY TECHNOLOGY



- LEAD ACID DRY CHARGED CONSTRUCTION
- NO ACID IN CELLS BEFORE ACTIVATION
- NEED TO BE FILLED BEFORE FIRST USE
- HAS TO BE CHECKED PERIODICALLY AND REFILLED IF NECESSARY
- UPRIGHT INSTALLATION ONLY
- REGULAR LIFE DURATION
- DOESN'T NEED TO BE RECHARGED DURING SHELF LIFE

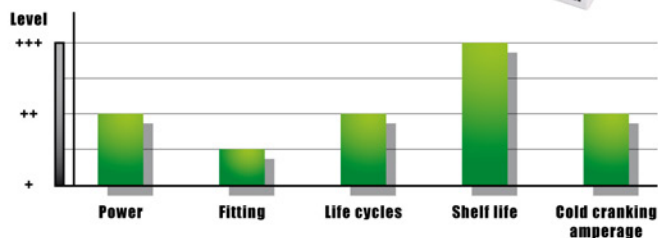


Technical features

Battery type	Voltage V	Capacity Ah (10h)	Factory activated	Non spillable	Acid pack included	Magic Eye	Handle	In box	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
									L	W	H		Front	Side	Top	3D
12N12A-4A-1	12	12	No	No	Yes	No	No	Yes	134	80	160					
12N14-3A	12	14	No	No	Yes	No	No	Yes	134	89	166					
12N14-4A	12	14	No	No	Yes	No	No	Yes	134	89	166					
12N18-3A	12	18	No	No	Yes	No	No	Yes	205	90	162					
12N18-4A	12	18	No	No	Yes	No	No	Yes	205	90	162					
12N24-3A	12	24	No	No	Yes	No	No	Yes	184	124	175					
12N24-4A	12	24	No	No	Yes	No	No	Yes	184	124	175					
U1-9	12	24	No	No	Yes	No	No	Yes	195	130	180					
U1R-9	12	24	No	No	Yes	No	No	Yes	195	130	180					
F50-N18L-A	12	20	No	No	Yes	No	No	Yes	205	90	162					
F60-N24L-A	12	24	No	No	Yes	No	No	Yes	184	124	169					
F60-N30L-B	12	30	No	No	Yes	No	No	Yes	185	128	168					

NON EXHAUSTIVE LIST

VRLA TECHNOLOGY

- MAINTENANCE FREE, NO WATER ADDING REQUIRED
- SEALED VALVE-REGULATED
- SPILL PROOF / LEAK PROOF
- DEEP DISCHARGE PROTECTION
- NO CORROSION
- MULTI-POSITIONAL FITMENT
- LOW GASSING
- LONG SHELF LIFE
- VERY GOOD CYCLING AND STATIONARY PERFORMANCE

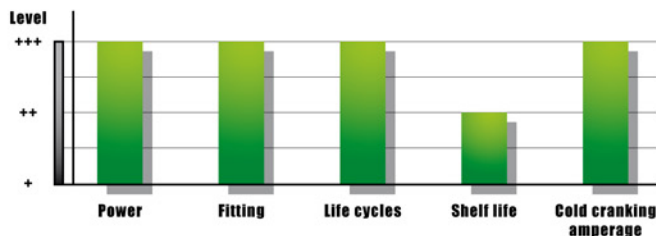

Technical features

Battery type	Voltage V	Capacity Ah (10h)	Capacity Ah (20h)	Factory activated	Non spillable	Acid pack included	Magic Eye	Handle	In box	Dimensions mm (±2mm)			Assembly drawing	Terminal drawings			
										L	W	H		Front	Side	Top	3D
FP12-4.5	12	-	4.5	Yes	Yes	No	No	No	Yes	90	70	107					
FP12-7	12	-	7	Yes	Yes	No	No	No	Yes	151	65	99					
FP12-10H	12	-	10	Yes	Yes	No	No	No	Yes	151	65	117					
FP12-12	12	-	12	Yes	Yes	No	No	No	Yes	151	98	101					
FP12-14	12	-	14	Yes	Yes	No	No	No	Yes	151	98	101					

NON EXHAUSTIVE LIST

	GEL	SLA	MF	DRY	CA/CA	VRLA
Battery voltage	12V	12V	12V	6 - 12V	12V	12V
No self discharge during storage	-	-	✓	✓	-	-
VRLA / AGM battery	✓	✓	✓	-	-	✓
Maintenance Free	✓	✓	✓	-	✓	✓
Plate sulfation minimized	✓	✓	✓	-	✓	✓
Suitable for cold weather	✓	✓	✓	-	✓	✓
Multipositional fitment	✓	✓	-	-	-	✓
Ready to use out of the box	✓	✓	-	-	✓	✓
Wet charged factory activated	✓	✓	-	-	✓	✓
Easy to carry	✓	✓	-	-	✓	✓
Easy to ship	✓	✓	-	-	-	✓
No acid handling	✓	✓	-	-	✓	✓



Designation

- A. Vented type (normal type)
- B. Indication of different size of the same capacity batteries
- C. Polarity location (Fig. 1)
- D. Location of opening for exhaust (Fig. 2)
- E. Type of terminal
- F. Symbol of FULBAT batteries
- G. Performance level
- H. Cranking or starting power
- I. Symbol of FULBAT MF batteries
- J. Acid pack supplied
- K. Optimal performance



F	50	-	N	18	L	-	A
F	H		A	G	C		D

FT	Z	12	S				
FT	X	5	L	-	B	S	
I	K	G	C			J	

FB	12	A	L	-	A	2
F	H	B	C		D	E

FT	X	20	H	L	-	B	S
I	K	G	K	C		J	



"E" Polarity location

"L" indicates positive terminal is located at right side.

- 1 +	+ 2 -	- 3 +	+ 4 -
6N4C-1B	6N4-2A	YB10L-A2	YB12A-A



"F" Location of opening for exhaust

A	B	C	D
12N7-4A	YB16CL-B	6N2A-2C	6N6-1D-2

FULLLOAD 750

VOLTAGE

6-12v

CHARGING RATE

750mA

STAGES

3



FULLLOAD 1000

VOLTAGE

6-12v

CHARGING RATE

1A

STAGES

3



FEATURES

- SMART BATTERY CHARGER AND MAINTAINER
- FOR ALL LEAD ACID BATTERIES: GEL, SLA, MF AND DRY
- SECURE CHARGE
- EASY TO USE
- FOR BATTERIES OF CAPACITY UP TO 20AH
- REVERSE POLARITY PROTECTION
- DELIVERED WITH CLAMPS AND FUSED CONNECTION SET

FEATURES

- SMART BATTERY CHARGER AND MAINTAINER
- FOR ALL LEAD ACID BATTERIES: GEL, SLA, MF AND DRY
- VOLTAGE OUTPUT SELECTION (SWITCH)
- SECURE CHARGE
- RAPID CHARGE FUNCTION
- EASY TO USE
- FOR BATTERIES OF CAPACITY UP TO 20AH
- REVERSE POLARITY PROTECTION
- DELIVERED WITH CLAMPS AND FUSED CONNECTION SET



**FULLLOAD
1500**

VOLTAGE
12v


CHARGING RATE
1.5A

STAGES
8



FEATURES

- FOR ALL LEAD ACID BATTERIES: GEL, SLA, MF AND DRY
- SECURE CHARGE
- RAPID CHARGE FUNCTION
- EASY TO USE
- FOR BATTERIES OF CAPACITY UP TO 30AH
- REVERSE POLARITY PROTECTION
- DELIVERED WITH CLAMPS AND FUSED CONNECTION SET

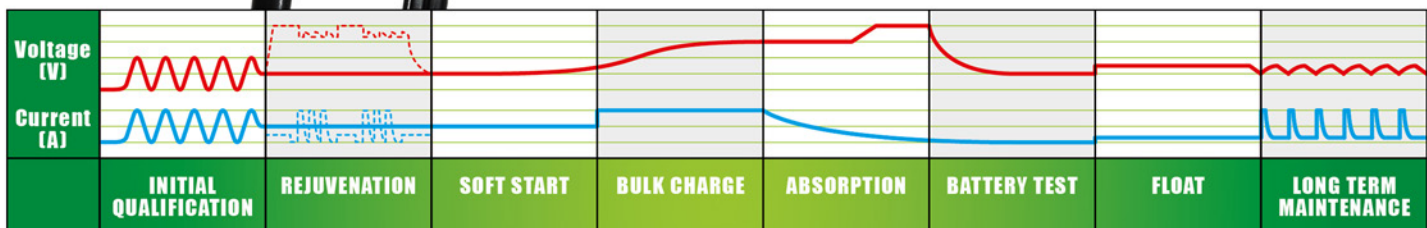

**FULLLOAD
F12**


VOLTAGE
12v

CHARGING RATE
1-8-12A


STAGES
9

FEATURES

- FOR ALL BATTERIES: GEL, SLA, MF AND DRY
- IDEAL FOR LONG-TERM MAINTENANCE
- SAFE AND EASY TO USE
- NEVER OVERCHARGE YOUR BATTERY
- DELIVERED WITH BATTERY CLAMPS AND FUSED CONNECTION SET
- INTERNAL OVER HEAT PROTECTION

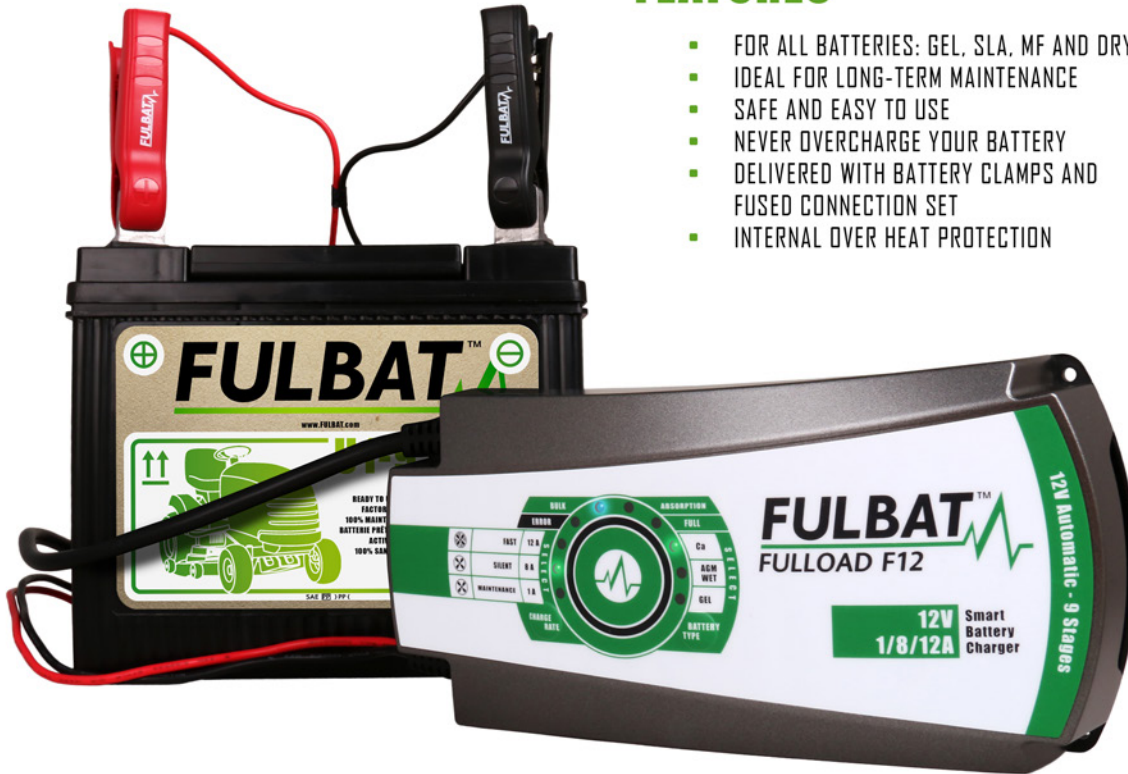

SUITABLE FOR SMALL SCOOTERS, MOTORCYCLES AND CARS

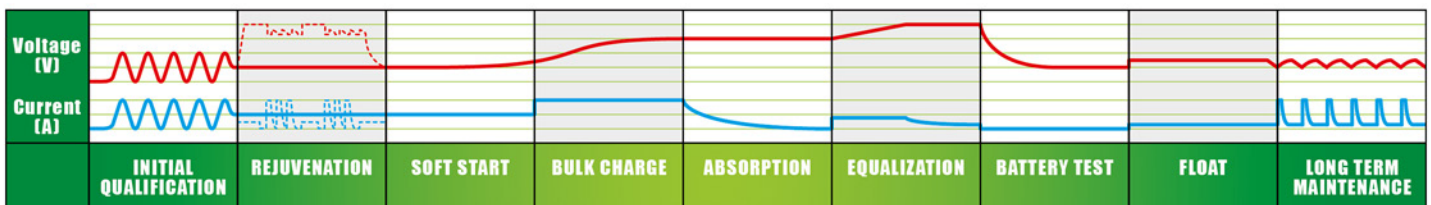

FULLLOAD
1500


VOLTAGE
12v

CHARGING RATE
1.5A

STAGES
8



FEATURES

- FOR ALL LEAD ACID BATTERIES: GEL, SLA, MF AND DRY
- SECURE CHARGE
- RAPID CHARGE FUNCTION
- EASY TO USE
- FOR BATTERIES OF CAPACITY UP TO 30AH
- REVERSE POLARITY PROTECTION
- DELIVERED WITH 5 CLAMP SETS

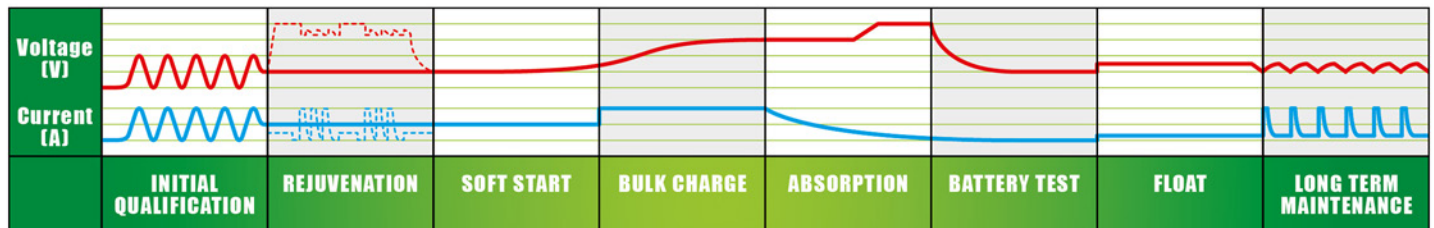

FULTEST 1

- TEST THE CONDITION OF YOUR BATTERY AND ALTERNATOR
- CONTROL THE RIGHT STARTING ABILITY OF YOUR VEHICLE
- IMMEDIATE DIAGNOSIS

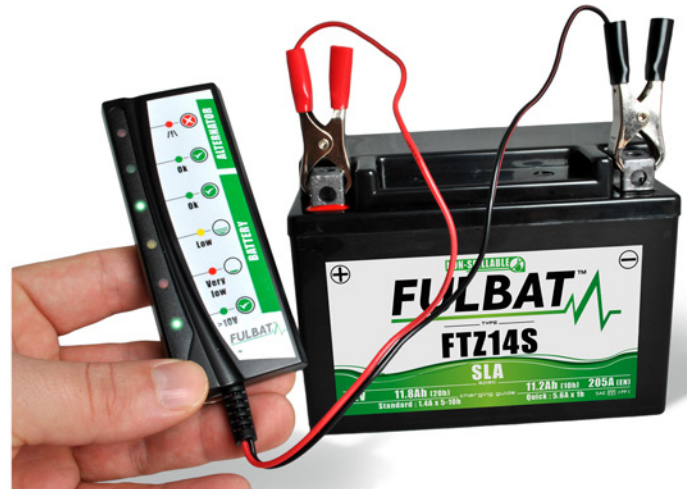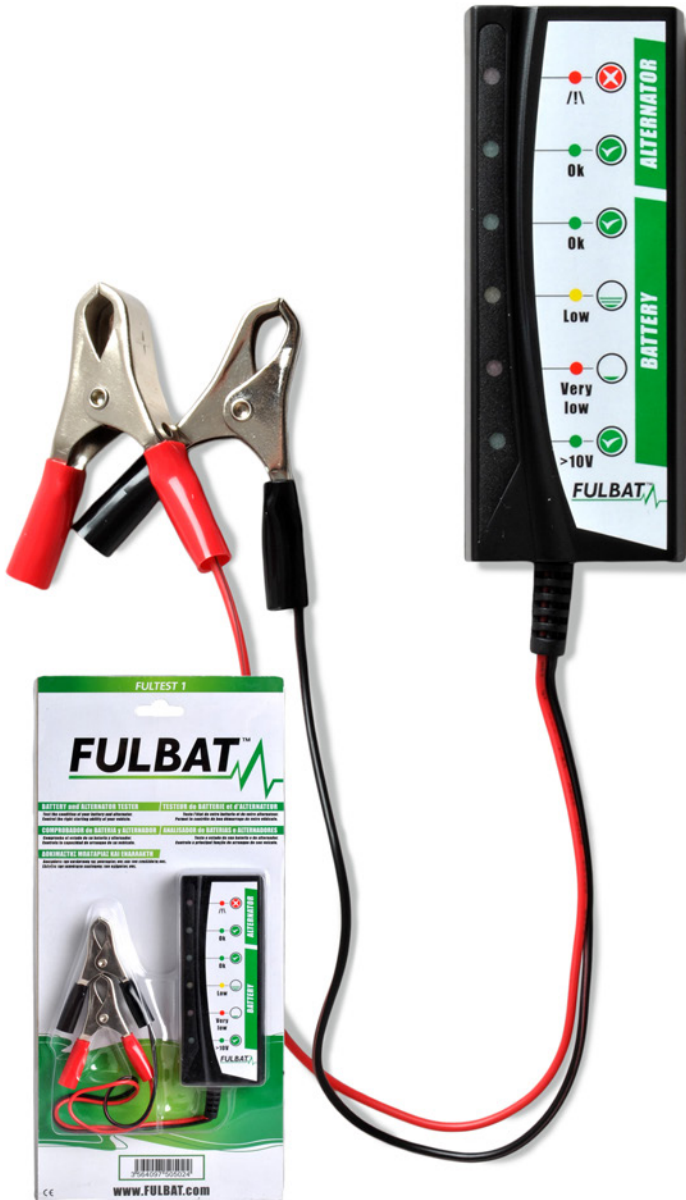

Which battery equipped your motorcycle ?
Find easily the required battery through the following application list.


Brand

Cc

Model

Year

>>> Required battery <<<

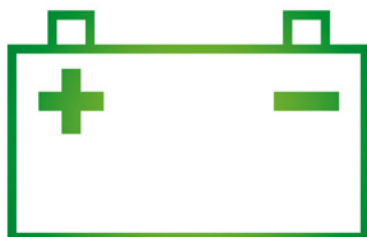

An interactive module to find your battery
is also available on our website:
www.fulbat.com/Moto-Scooter/



DEALER SHOP STICKER



- Official dealer sticker
- Ø 13 cm

PENS



- Classic pen or tablet pen
- Green and chrome
- Per 100 pcs

2017 CATALOG



- 36 pages
- 2017 release
- Per 25 pcs

CAP



- Black and white
- White and green logo

UMBRELLA



- White
- Ø 122 cm

STICKERS




- Fulbat stickers - white background
- Available in :
180x60 mm (per 50 pcs), 90x30mm (per 100 pcs)

T-SHIRT



- Black and white
- White and green logo

MOBILE STAND

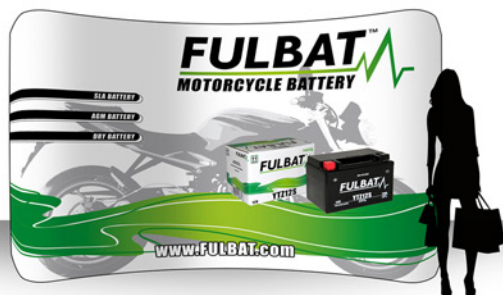

- Includes a carrying case / countertop
- 255 x 222 x 72 (width x height x depth), 24 kg

ROLL-UP




- Motorcycle range
- Easy to use, move and install
- 85 x 200 cm, 2.7 kg

X-BANNER



- Lawn & Garden range
- Easy to use, move and install
- 85 x 200 cm, 1.2 kg

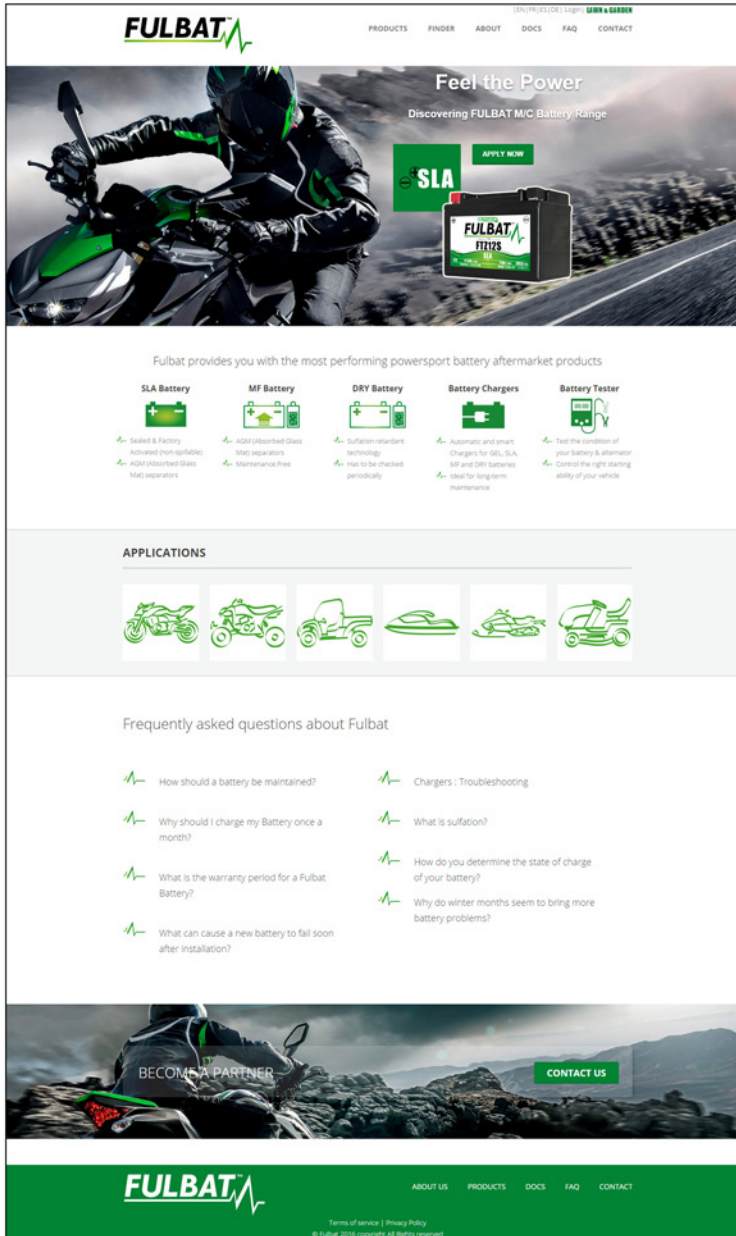

FULBAT™

PRODUCTS FINDER ABOUT DOCS FAQ CONTACT

Feel the Power
Discovering FULBAT MC Battery Range

SLA [APPLY NOW](#)

Fulbat provides you with the most performing powersport battery aftermarket products

- SLA Battery**
 - Sealed & Factory Activated (non-spillable)
 - AGM (Absorbed Glass Mat) separators
- MF Battery**
 - AGM (Absorbed Glass Mat) separators
 - Maintenance Free
- DRY Battery**
 - Sulfation-reversal technology
 - How to be checked periodically
- Battery Chargers**
 - Automatic and smart Chargers for GEL, SLA, MF and DRY batteries
 - Ideal for long term maintenance
- Battery Tester**
 - Test the condition of your battery & alternator
 - Control the right starting ability of your vehicle

APPLICATIONS

Frequently asked questions about Fulbat

- How should a battery be maintained?
- Why should I charge my Battery once a month?
- What is the warranty period for a Fulbat Battery?
- What can cause a new battery to fail soon after installation?
- Chargers : Troubleshooting
- What is sulfation?
- How do you determine the state of charge of your battery?
- Why do winter months seem to bring more battery problems?

FULBAT™

ABOUT US PRODUCTS DOCS FAQ CONTACT


Terms of service | Privacy Policy
© Fulbat 2016 copyright. All rights reserved.

Fulbat website gives the brand a strong online presence. It offers a detailed description of every product available. The search engine is updated regularly for all powersport vehicles. Each client has a private area with files and customized downloadable material.

Register in our members area for quotations requests and downloads :

- Customer dedicated download center
- Order forms / Quotation request
- HD pictures & Logos
- Pdfs
- Artworks
- Stickers

Create your member access instantly on fulbat.com. This dedicated area allows you to download all material and order online the whole fulbat products in a few clicks.

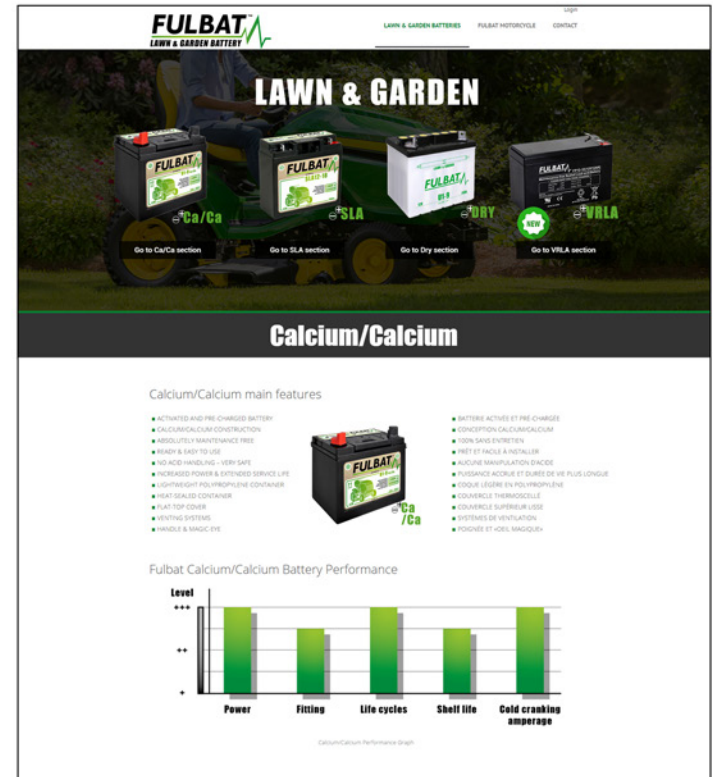

FULBAT™

LAWN & GARDEN BATTERIES FULBAT MOTORCYCLE CONTACT

LAWN & GARDEN

Ca/Ca SLA DRY VRLA

Go to Ca/Ca section Go to SLA section Go to Dry section Go to VRLA section

Calcium/Calcium

Calcium/Calcium main features

- ACTIVATED AND PRE-CHARGED BATTERY
- CALCIUM/CALCIUM CONSTRUCTION
- REDUCED MAINTENANCE FREE
- READY & EASY TO USE
- NO ACID HANDLING - VERY SAFE
- INCREASED POWER & EXTENDED SERVICE LIFE
- LIGHTWEIGHT POLYPROPYLENE CONTAINER
- HEAT SEALED CONTAINER
- HEAT TAP COVER
- VENTING SYSTEMS
- HANDLE & MAGIC EYE
- BATTERIE ACTIVE ET PRE-CHARGE
- CONSTRUCTION CALCIUM/CALCIUM
- POUVAIRIE MINIMALE
- PRET ET FACILE A INSTALLER
- ALIGNE MANIPULATION ENCASE
- PUISSANCE ACCRUE ET DUREE DE VIE PLUS LONGUE
- COQUE LEGERE EN POLYPROPYLENE
- COUVERCLE THERMOSELLE
- BOUCHE SUPERIEUR LOSE
- SYSTEMES DE VENTILATION
- POIGNEE ET OUEL MAGIQUE

Fulbat Calcium/Calcium Battery Performance

Level

Power Fitting Life cycles Shelf life Cold cranking amperage

Calcium/Calcium Performance Graph



Distributor / Retailer stamp



BATTERY PROGRAM
www.fulbat.com

Release : December 2016